




WASSERPURE

- WASSERTECHNIK -

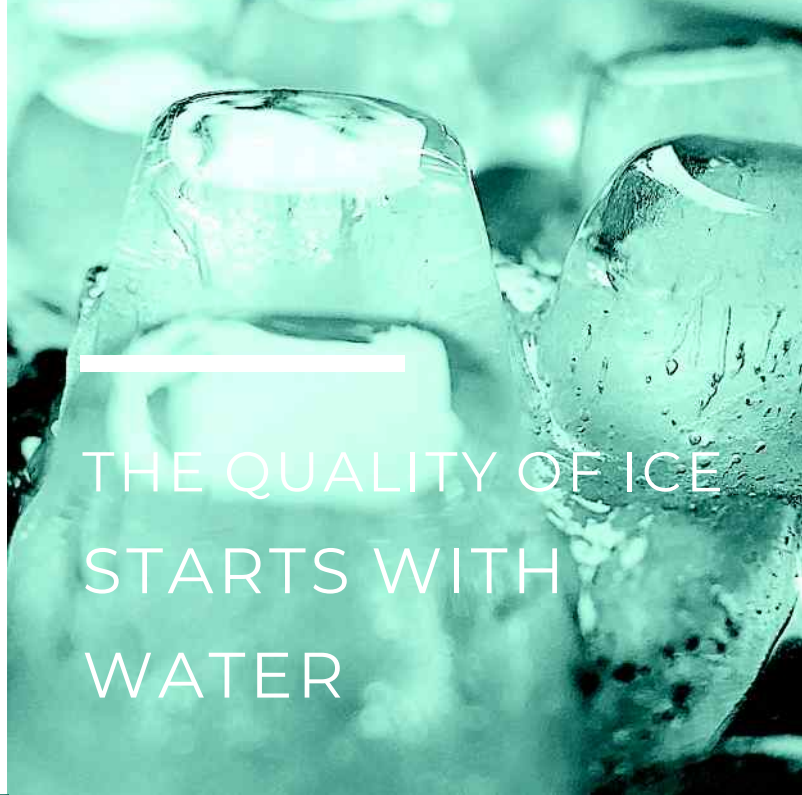

THE QUALITY OF ICE
STARTS WITH
WATER



WATER FOR ICE CUBE MACHINES

THE ICE CUBES SHOULD BE PERFECTLY TRANSPARENT AND MADE FROM BACTERIOLOGICALLY PURE WATER. ICE CUBES SHOULD BE ALSO DEVOID OF ALL TASTE AND SMELL. MOREOVER, WHEN WATER HARDNESS IS ABOVE 15 GERMAN DEGREES ICE CUBE MACHINE ARE EXPOSED TO LIMESCALE FORMATION. THE COMMON PHENOMENON OBSERVED IN ICE CUBES IS THE DEVELOPMENT OF MICROORGANISMS, ALGAE.

THE **AQUACUBE** FILTER MEETS ALL THE CONDITIONS TO ENSURE PROPER WATER QUALITY FOR THE ICE CUBE MACHINES.

HOWEVER WHEN WATER HARDNESS LEVEL IS VERY HIGH, AN AUTOMATIC SOFTENER SHOULD BE USED.

IF THE MINERAL CONTENT (TDS LEVEL) EXCEEDS 400 MG/L OFTEN FAILS TO OBTAIN CRYSTAL CLEAR ICE CUBES, THEN THE ONLY METHOD IS THE REVERSE OSMOSIS SYSTEM **ROX**.



AQUA CUBE - WATER FILTER WITH REPLACEABLE CARTRIDGE.

APPLICATION: ICE CUBE MAKER | DRINKING WATER

ADVANTAGES:

- HIGH QUALITY WATER PRODUCTION,
- MECHANICAL CONTAMINATION REMOVAL IN EXCESS OF 5 MICROMETERS,
- LIMESCALE PROTECTION,
- CHEMICAL CONTAMINATION REMOVAL (E.G. CHLORIDE, HEAVY METALS, PESTICIDES ETC.),
- ORGANIC CONTAMINATION REMOVAL (E.G. HUMUSSES, FENOSL ETC.),
- PREVENTION AGAINST THE GROWTH OF BACTERIA, MICROORGANISMS, ALGAE.



TYPE	AMOUNT OF TREATED WATER AT 10° dGH AND CHLORINE CONTENT IN WATER UP TO 0.3 mg / L	FLOW RATE [L / MIN]	DIMENSIONS [mm] WIDTH / HEIGHT
AQUA CUBE	60.000 LITERS	0 - 8	180 / 310

ANTI LIMESCALE FACTOR WORKS ONLY WITH WATER UP TO 60° C.
WE DO NOT RECOMEND TO USE TREATED WATER FOR BOILING AND STEAM PRODUCTION.



WASSERPURE

- WASSERTECHNIK -

WASSERPURE EUROPE SP ZOO
UL. SIENKIEWICZA 49
42-600 TARNOWSKIE GÓRY
TEL. 0048 575 500 676
EUROPE@WASSERPURE.COM

WASSERPURE.COM